## CORPS DENT CAMPGROUND (PWS # 2180008) SOURCE WATER ASSESSMENT FINAL REPORT

May 7, 2002



## State of Idaho Department of Environmental Quality

**Disclaimer:** This publication has been developed as part of an informational service for the source water assessments of public water systems in Idaho and is based on the data available at the time and the professional judgement of the staff. Although reasonable efforts have been made to present accurate information, no guarantees, including expressed or implied warranties of any kind, are made with respect to this publication by the State of Idaho or any of its agencies, employees, or agents, who also assume no legal responsibility for the accuracy of presentations, comments, or other information in this publication. The assessment is subject to modification if new data is produced.

### **Executive Summary**

Under the Federal Safe Drinking Water Act Amendments of 1996, all states are required by the U.S. Environmental Protection Agency (EPA) to assess every source of public drinking water for its relative sensitivity to contaminants regulated by the Act. The Idaho Department of Environmental Quality (DEQ) is completing the assessments for all Idaho public drinking water systems. The assessment for your particular drinking water source is based on a land use inventory within a 1,000-foot radius of your drinking water source, sensitivity factors associated with the source, and characteristics associated with either your aquifer or watershed in which you live.

This report, Source Water Assessment for Corps Dent Campground: Public Water System (PWS) #2180008 describes the public drinking water system, the associated potential contaminant sources located within a 1,000-foot boundary around the drinking water source, and the susceptibility (risk) that may be associated with any associated potential contaminants. This assessment should be used as a planning tool, taken into account with local knowledge and concerns, to develop and implement appropriate protection measures for this system. The results should <u>not be</u> used as an absolute measure of risk and is not intended to undermine the confidence in your water system.

Final susceptibility scores are derived from equally weighting system construction scores, hydrologic sensitivity scores, and potential contaminant/land use scores. Therefore, a low rating in one or two categories coupled with a higher rating in other categories results in a final rating of low, moderate, or high susceptibility. With the potential contaminants associated with most urban and heavily agricultural areas, the best score a well can get is moderate. Potential contaminants are divided into four categories, inorganic contaminants (IOCs, i.e. nitrates, arsenic), volatile organic contaminants (VOCs, i.e. petroleum products), synthetic organic contaminants (SOCs, i.e. pesticides), and microbial contaminants (i.e. bacteria). As different wells can be subject to various contamination settings, separate scores are given for each type of contaminant.

The *Corps Dent Campground* drinking water system consists of two wells. The Lagoon and Roadway wells provide drinking water to the Corps Dent Campground located near Dworshak Dam and Reservoir. The Lagoon Well rated moderate susceptibility to all potential contaminant categories. The Roadway Well rated an automatic high susceptibility to all potential contaminants due to the campground road that lies within 50 feet of the wellhead. The high system construction scores combined with the limited number of potential contaminant sources and the predominant rangeland surrounding the wells reflect the overall susceptibility of the wells.

The initial computer generated contaminant source inventory conducted by the DEQ did not locate any potential contaminant sources within the 1,000-foot boundary. However, the secondary or enhanced inventory conducted by the operator identified the campground and evapo-transpiration lagoons as well as a hay field and an aeration lagoon. The geographical information system (GIS) map shows that the Roadway Well lies within 50 feet of the campground road (Tables 1 and 2 below). A copy of the susceptibility analysis worksheet for your system along with a map showing any potential contaminant sources is included with this summary.

Table 1. Corps Dent Campground, Roadway Well, Potential Contaminant Inventory

SITE#	Source Description <sup>1</sup>	Source of Information	Potential Contaminants <sup>2</sup>
1	Evapo Transpiration Lagoon	Enhanced Inventory	IOC,VOC,SOC,Microbes
2	Campground- Full Hookup	Enhanced Inventory	IOC,VOC,SOC,Microbes
	Campground Road	GIS Map	IOC, VOC, SOC, Microbes

<sup>&</sup>lt;sup>2</sup>IOC = inorganic chemical, VOC = volatile organic chemical, SOC = synthetic organic chemical

Table 2. Corps Dent Campground, Lagoon Well, Potential Contaminant Inventory

SITE#	Source Description <sup>1</sup>	Source of Information	Potential Contaminants <sup>2</sup>
1	Hay Field	Enhanced Inventory	IOC, SOC
2	Evapo Transpiration Lagoon	Enhanced Inventory	IOC,VOC,SOC,Microbes
3	Evapo Transpiration Lagoon	Enhanced Inventory	IOC,VOC,SOC,Microbes
4	Aeration Lagoon	Enhanced Inventory	IOC,VOC,SOC,Microbes
5	Campground- Full Hookup	Enhanced Inventory	IOC,VOC,SOC,Microbes

<sup>&</sup>lt;sup>2</sup>IOC = inorganic chemical, VOC = volatile organic chemical, SOC = synthetic organic chemical

### **Susceptibility Analysis**

The water system's susceptibility to contamination was ranked as high, moderate, or low risk according to the following considerations: hydrologic characteristics, physical integrity of the well, land use characteristics, and potentially significant contaminant sources. The susceptibility rankings are specific to a particular potential contaminant or category of contaminants. Therefore, a high susceptibility rating relative to one potential contaminant does not mean that the water system is at the same risk for all other potential contaminants. The relative ranking that is derived for each well is a qualitative, screening-level step that, in many cases, uses generalized assumptions and best professional judgement. The following summaries describe the rationale for the susceptibility ranking.

### **Hydrologic Sensitivity**

The hydrologic sensitivity of a well is dependent upon four factors: the surface soil composition, the material in the vadose zone (between the land surface and the water table), the depth to first ground water, and the presence of a 50-foot thick fine-grained zone above the producing zone of the well. Slowly draining soils such as silt and clay typically are more protective of ground water than coarse-grained soils such as sand and gravel. Similarly, fine-grained sediments in the subsurface and a water depth of more than 300 feet protect the ground water from contamination.

The hydrologic sensitivity is moderate for both wells. Regional soil data indicates the presence of poor to moderately draining soils, which can potentially decrease the downward migration of contaminants to the aquifer. The well logs were unavailable, preventing a determination of the depth to ground water, composition of the vadose zone, or presence of low permeability layers above the producing zone of the wells.

#### **Well Construction**

Well construction directly affects the ability of the well to protect the aquifer from contaminants. System construction scores are reduced when information shows that potential contaminants will have a more

difficult time reaching the intake of the well. Lower scores imply a system is less vulnerable to contamination. For example, if the well casing and annular seal both extend into a low permeability unit, then the possibility of contamination is reduced and the system construction score goes down. If the highest production interval is more than 100 feet below the water table, then the system is considered to have better buffering capacity. If the wellhead and surface seal are maintained to standards, as outlined in Sanitary Surveys, then contamination down the well bore is less likely. If the well is protected from surface flooding and is outside the 100-year floodplain, then contamination from surface events is reduced.

Both Corps Dent Campground drinking water wells rated high for system construction. Sanitary surveys for both wells were unavailable, preventing a determination of the maintenance of the wellhead and surface seals and whether the wells are properly protected from surface flooding. However, a 1998 Ground Water Under Direct Influence (GWUDI) field survey indicates that the Lagoon Well is protected by a brick wellhouse and that the well is located outside of the 100-year flood plain. Though the wells may have met construction standards at the time of installation, current well construction standards are more stringent.

The Idaho Department of Water Resources *Well Construction Standards Rules* (1993) require all Public Water Systems (PWSs) to follow DEQ standards as well. IDAPA 58.01.08.550 requires that PWSs follow the *Recommended Standards for Water Works* (1997) during construction. Some of the requirements include casing thickness, well tests, and depth and formation type that the surface seal must be installed into. Table 1 of the *Recommended Standards for Water Works* (1997) lists the required steel casing thickness for various diameter wells. Well tests are required at the design pumping rate for 24 hours or until stabilized drawdown has continued for at least six hours when pumping at 1.5 times the design pumping rate.

#### **Potential Contaminant Source and Land Use**

The Lagoon Well rated moderate and the Roadway Well rated low for IOCs (e.g., arsenic, nitrate), VOCs (e.g., petroleum products), SOCs (e.g., pesticides), and microbial contaminants (e.g., bacteria). The limited number of potential contaminant sources and the predominant rangeland that surrounds the wellheads contributed to the land use ratings.

### **Final Susceptibility Rating**

An IOC detection above a drinking water standard MCL, any detection of a VOC or SOC, or a detection of total coliform bacteria or fecal coliform bacteria at the wellhead will automatically give a high susceptibility rating to a well, despite the land use of the area, because a pathway for contamination already exists. Additionally, having potential contaminant sources within 50 feet of the wellhead will give an automatic high susceptibility rating. In this case, the Roadway Well has an automatic high susceptibility to all potential contaminant categories due to the campground road that passes within 50 feet of the wellhead. Hydrologic sensitivity and system construction scores are heavily weighted in the final scores. Having multiple potential contaminant sources in the 0- to 3-year time-of-travel zone (Zone 1B) and much agricultural land contribute greatly to the overall ranking. In terms of total susceptibility, the Roadway Well rated high and the Lagoon Well rated moderate to IOCs, VOCs, SOCs, and microbial contaminants. The limited number of potential contaminant sources and the rangeland within the delineated areas of the wells combined with the high system construction scores and the moderate hydrologic sensitivity of the area contributed to the overall susceptibility of the wells.

### **Options for Drinking Water Protection**

This assessment should be used as a basis for determining appropriate new protection measures or reevaluating existing protection efforts. No matter what ranking a source receives, protection is always important. Whether the source is currently located in a "pristine" area or an area with numerous industrial and/or agricultural land uses, the way to ensure good water quality in the future is to act now to protect valuable water supply resources.

For the Corps Dent Campground, drinking water protection activities should focus on implementation practices aimed at maintaining well construction to avoid contamination from sources such as the campground road, the lagoons, and the hay field within the designated source water areas. The campground road that runs within 50 feet of the Roadway Well may need to be limited or diverted to avoid potential contamination of the well from accidental spills or releases. Partnerships with state and local agencies and industry groups should be established and are critical to success. You may want to establish a dialog with the relevant state and local agencies related to wellhead protection. Drinking water protection activities should be aimed at long-term management strategies even though these strategies may not yield results in the near term.

Due to the time involved with the movement of ground water, drinking water protection activities should be aimed at long-term management strategies even though these strategies may not yield results in the near term. A strong public education program should be a primary focus of any drinking water protection plan. There are multiple resources available to help communities implement protection programs, including the Drinking Water Academy of the EPA. For areas where transportation corridors transect the delineation, the Department of Transportation should be included in protection activities. Drinking water protection activities for agriculture should be coordinated with the Idaho State Department of Agriculture, the Soil Conservation Commission, the local Soil Conservation District, and the Natural Resources Conservation Service.

#### **Assistance**

Public water suppliers and others may call the following DEQ offices with questions about this assessment and to request assistance with developing and implementing a local protection plan. In addition, draft protection plans may be submitted to the DEQ office for preliminary review and comments.

Lewiston Regional DEO Office (208) 799-4370


State DEQ Office (208) 373-0502

Website: http://www2.state.id.us/deq

Water suppliers serving fewer than 10,000 persons may contact John Bokor, Idaho Rural Water Association, at 1-800-962-3257 for assistance with drinking water protection (formerly wellhead protection) strategies.

# Corps Dent Campground: Lagoon Well

PWS Number: 2180008

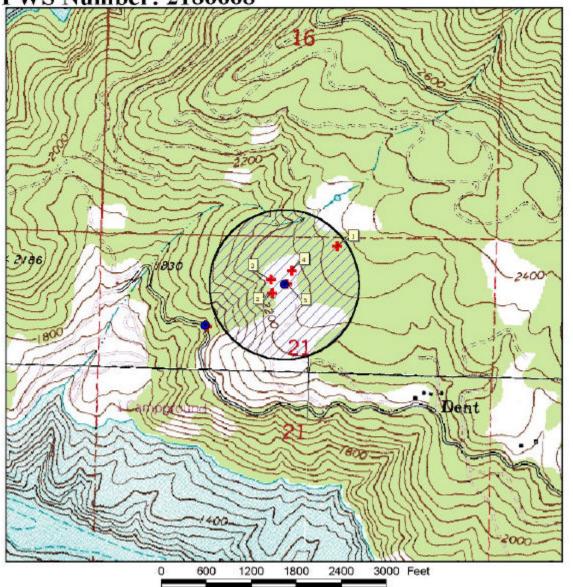

## LEGEND





1B (3 yr TOT)

- Wellhead
- Enhanced Inventory
- CERCLIS Site
- RICRIS Site
- ★ Dairy
- LUST Site
- Closed UST Site
- Open UST Site
- Business Mailing List
- NPDES Site
- ☆ Mine
- AST
- Toxic Release Inventory
- SARA Title III Site (EPCRA)
- Recharge Point
- Injection Well
- Group1 Site
- Cyanide Site
- Landfill
- Wastewater Land App. Site

Restriction of Liability:
Neither the State of Idaho nor the Idaho
Department of Environmental Quality, nor any of
their employees make any warranty, express or
implied, or assume any legal liability or responsibility
for the accuracy, completaments or usefulness of any
information or data provided. Metadata is provided
for all data sets, and no data should be used
without first reading and understanding its
limitations. The data could include technical
insocuracies or typographical errors. The
Department of Environmental Quality may update,
modify, or revise the data used at any time, without

# Corps Dent Campground: Roadway Well

PWS Number: 2180008 × 2186 1200 1800 2400 3000 Feet

## LEGEND





1B (3 yr TOT)

- Wellhead
- Enhanced Inventory
- CERCLIS Site
- RICRIS Site
- ★ Dairy
- LUST Site
- ▲ Closed UST Site
- Open UST Site
- Business Mailing List
- NPDES Site
- ☆ Mine
- AST
- Toxic Release Inventory
- SARA Title III Site (EPCRA)
- Recharge Point
- Injection Well
- Group1 Site
- Cyanide Site
- Landfill
- Wastewater Land App. Site

Restriction of Liability:
Neither the State of Idaho nor the Idaho
Department of Environmental Quality, nor any of
their employees make any warranty, express or
implied, or assume any legal liability or responsibility
for the accuracy, completeness or usefulness of any
information or data provided. Metadata is provided
for all data sets, and no data should be used
without first reading and understanding its
limitations. The data could include technical
inaccuracies or typographical errors. The
Department of Environmental Quality may update,
modify, or revise the data used at any time, without

#### POTENTIAL CONTAMINANT INVENTORY LIST OF ACRONYMS AND DEFINITIONS

<u>AST (Aboveground Storage Tanks)</u> – Sites with aboveground storage tanks.

<u>Business Mailing List</u> – This list contains potential contaminant sites identified through a yellow pages database search of standard industry codes (SIC).

<u>CERCLIS</u> – This includes sites considered for listing under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA). CERCLA, more commonly known as ASuperfund≅ is designed to clean up hazardous waste sites that are on the national priority list (NPL).

<u>Cyanide Site</u> – DEQ permitted and known historical sites/facilities using cyanide.

<u>Dairy</u> – Sites included in the primary contaminant source inventory represent those facilities regulated by Idaho State Department of Agriculture (ISDA) and may range from a few head to several thousand head of milking cows.

<u>Deep Injection Well</u> – Injection wells regulated under the Idaho Department of Water Resources generally for the disposal of stormwater runoff or agricultural field drainage.

Enhanced Inventory – Enhanced inventory locations are potential contaminant source sites added by the water system. These can include new sites not captured during the primary contaminant inventory, or corrected locations for sites not properly located during the primary contaminant inventory. Enhanced inventory sites can also include miscellaneous sites added by the Idaho Department of Environmental Quality (IDEQ) during the primary contaminant inventory.

 ${\color{red} {\bf Floodplain}}$  – This is a coverage of the 100year floodplains.

<u>Group 1 Sites</u> – These are sites that show elevated levels of contaminants and are not within the priority one areas.

<u>Inorganic Priority Area</u> – Priority one areas where greater than 25% of the wells/springs show constituents higher than primary standards or other health standards.

<u>Landfill</u> – Areas of open and closed municipal and non-municipal landfills.

<u>LUST (Leaking Underground Storage Tank)</u> – Potential contaminant source sites associated with leaking underground storage tanks as regulated under RCRA.

<u>Mines and Quarries</u> – Mines and quarries permitted through the Idaho Department of Lands.)

<u>Nitrate Priority Area</u> – Area where greater than 25% of wells/springs show nitrate values above 5mg/l.

NPDES (National Pollutant Discharge Elimination System) – Sites with NPDES permits. The Clean Water Act requires that any discharge of a pollutant to waters of the United States from a point source must be authorized by an NPDES permit.

Organic Priority Areas – These are any areas where greater than 25 % of wells/springs show levels greater than 1% of the primary standard or other health standards

<u>Recharge Point</u> – This includes active, proposed, and possible recharge sites on the Snake River Plain.

RICRIS – Site regulated under Conservation Recovery Act (RCRA). RCRA is commonly associated with the cradle to grave management approach for generation, storage, and disposal of hazardous wastes.

SARA Tier II (Superfund Amendments and Reauthorization Act Tier II Facilities) – These sites store certain types and amounts of hazardous materials and must be identified under the Community Right to Know Act.

<u>Toxic Release Inventory (TRI)</u> – The toxic release inventory list was developed as part of the Emergency Planning and Community Right to Know (Community Right to Know) Act passed in 1986. The Community Right to Know Act requires the reporting of any release of a chemical found on the TRI list.

<u>UST (Underground Storage Tank)</u> – Potential contaminant source sites associated with underground storage tanks regulated as regulated under RCRA.

<u>Wastewater Land Applications Sites</u> – These are areas where the land application of municipal or industrial wastewater is permitted by IDEQ.

<u>Wellheads</u> – These are drinking water well locations regulated under the Safe Drinking Water Act. They are not treated as potential contaminant sources.

**NOTE:** Many of the potential contaminant sources were located using a geocoding program where mailing addresses are used to locate a facility. Field verification of potential contaminant sources is an important element of an enhanced inventory.

Where possible, a list of potential contaminant sites unable to be located with geocoding will be provided to water systems to determine if the potential contaminant sources are located within the source water assessment area.

The final scores for the susceptibility analysis were determined using the following formulas:

- 1) VOC/SOC/IOC Final Score = Hydrologic Sensitivity + System Construction + (Potential Contaminant/Land Use x 0.273)
- 2) 2) Microbial Final Score = Hydrologic Sensitivity + System Construction + (Potential Contaminant/Land Use x 0.35)

Final Susceptibility Scoring:

- 0 5 Low Susceptibility
- 6 12 Moderate Susceptibility
- ≥ 13 High Susceptibility

Ground Water Susceptibility Report

Public Water System Name :

CORPS DENT CAMPGROUND

Well# : LAGOON WELL Public Water System Number 2180008 4/1/02 11:55:05 AM 1/1/1900 Driller Log Available NO Sanitary Survey (if yes, indicate date of last survey) NO 0 Well meets IDWR construction standards NO 1 Wellhead and surface seal maintained NO Casing and annular seal extend to low permeability unit NO Highest production 100 feet below static water level NO Well located outside the 100 year flood plain \_\_\_\_\_\_ Total System Construction Score 5 2. Hydrologic Sensitivity \_\_\_\_\_\_ Soils are poorly to moderately drained Ω Vadose zone composed of gravel, fractured rock or unknown YES 1 Depth to first water > 300 feet NO Aguitard present with > 50 feet cumulative thickness Total Hydrologic Score TOC VOC SOC Microbial 3. Potential Contaminant / Land Use - ZONE 1A Score Score Score Land Use Zone 1A RANGELAND, WOODLAND, BASALT 0 0 0 0 0 chemical use high NO 0 0 0 Farm chemical use high Total Potential Contaminant Source/Land Use Score - Zone 1A 0 0 IOC, VOC, SOC, or Microbial sources in Zone 1A NO Potential Contaminant / Land Use - ZONE 1B Contaminant sources present (Number of Sources) 5 (Score = # Sources X 2 ) 8 Points Maximum 8 8 Sources of Class II or III leacheable contaminants or 5 4 Points Maximum Zone 1B contains or intercepts a Group 1 Area NO Land use Zone 1B Less Than 25% Agricultural Land Cumulative Potential Contaminant / Land Use Score 4. Final Susceptibility Source 5. Final Well Ranking Moderate Moderate Moderate

Ground Water Susceptibility Report

Public Water System Name :

Ground Water Susceptibility Report	Public Water System Name	:				
	Public Water System Number	CORPS DENT CAMPGROUND 2180008	Well# :	ROADWAY N		11:55:24 AM
. System Construction			SCORE			
	Drill Date	1/1/1900				
	Driller Log Available	NO				
Sanitary Survey (if yes, indicat		NO	0			
	construction standards	NO	1			
Wellhead and s	surface seal maintained	NO	1			
Casing and annular seal extend to	low permeability unit	NO	2			
Highest production 100 feet be		NO	1			
Well located outside th		NO	1			
		Total System Construction Score	6			
2. Hydrologic Sensitivity						
	to moderately drained	YES	0			
Vadose zone composed of gravel, fra		YES	1			
	first water > 300 feet	NO	1			
Aquitard present with > 50 fee		NO	2			
		Total Hydrologic Score	4			
s. Potential Contaminant / Land Use - 2	ONE 12		IOC Score	VOC Score	SOC Score	Microbial Score
	Land Use Zone 1A	RANGELAND, WOODLAND, BASALT	0	0	0	0
	Farm chemical use high	NO	0	0	0	
IOC, VOC, SOC, or Microb		YES	YES	YES	YES	YES
		taminant Source/Land Use Score - Zone 1A	0	0	0	0
Potential Contaminant / Land Use -	ZONE 1B					
Contaminant sources prese	ent (Number of Sources)	YES	2	2	2	2
	2 ) 8 Points Maximum		4	4	4	4
Sources of Class II or III lead		YES	2	2	2	
	4 Points Maximum		2	2	2	
Zone 1B contains or int		NO	0	0	0	0
	Land use Zone 1B	Less Than 25% Agricultural Land	0	0	0	0
	Total Potential Conta	minant Source / Land Use Score - Zone 1B	6	6	6	4
Cumulative Potential Contaminant /	Land Use Score		 6	6	6	4
1. Final Susceptibility Source Score			12	12	12	12
5. Final Well Ranking			High	High	High	High